




OL-0311 LED OBSTRUCTION LIGHT

FEATURES :



- LIGHT INTENSITY > 10CD
- ICAO ANNEX TYPE A LOW INTENSITY OBSTACLE LIGHT COMPLIANCE
- SINGLE AND DUAL TYPE
- MAINTENANCE FREE & ENERGY SAVING
- LONG LIFE UP TO 100,000 HOURS
- 5 YEARS WARRANTY
- AVAILABLE BOTH AC AND DC VERSION

APPLICATION :

- TELECOM TOWERS
- BUILDINGS
- BRIDGES
- CHIMNEYS
- OHTL TOWERS

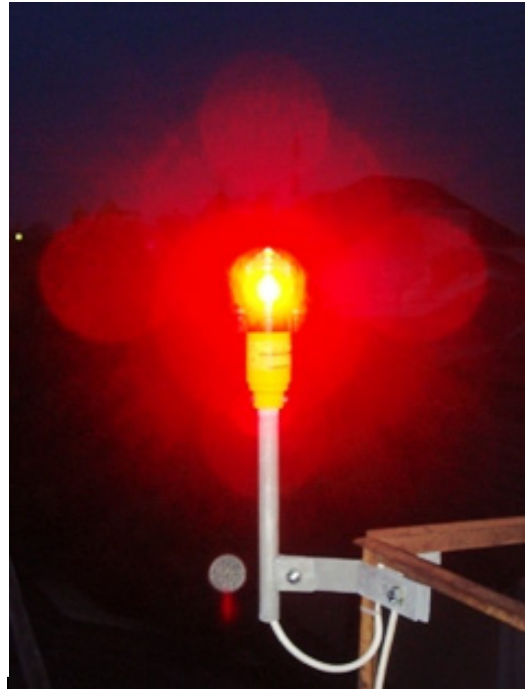

Type :	OL-0311
Light source:	Single luxeon III LED
Light Intensity (cd):	Greater than 10 cd
Light Color:	Aviation red 620 ~ 627 nm
Light mode :	Fixed or flashing
Operating voltage:	90 – 260 VAC 50/60 Hz or 12/24/48 VDC
Power consumption :	Approx. 5W
Individual LED life-time:	Approx. 100,000 hours
Ambient temperature range:	-20 to +60°C
Relative humidity:	< 95%
Protection degree:	IP65
Housing material :	Heavy duty Aluminum alloy
Lens cover :	Heavy duty glass 5mm thickness
Hardware:	Stainless steel
Weight:	Approx. 1.2 kg
Dimension:	204.5 mm x ϕ 90 mm (dia)
Installation :	Pipe $\frac{3}{4}$ " (dia)
Optional :	<ul style="list-style-type: none"> • Dual type kit • Solar system kit

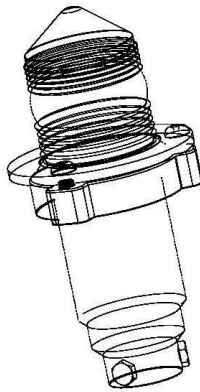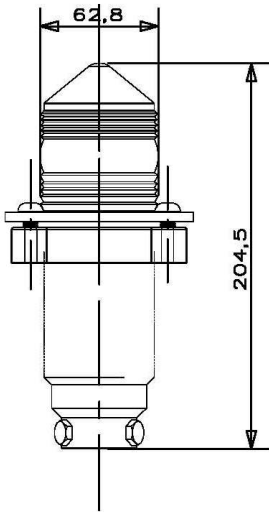

Authorized Reseller:

